




IP camera delivers 720p megapixel at 1280 \times 720 pixels, with sharper and larger image and video than standard analog security cameras. It covers more space with more details, with the 2.8mm wider angle lens.



SCB-20HD

Built-in 3W main solar panel, equipped with two 1.5w solar panels on both sides, absorbing energy in all directions, no dead ends, using imported chips. safer, smarter, faster charging, charging speed increased by 60%, intelligent The CI upgrade calculates the mod conversion rate to be fully upgraded.

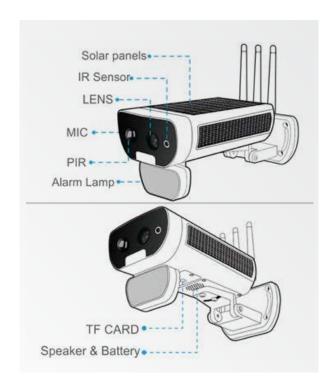

- Infrared distance: 6 high-power infrared LED, 25 meters night vision, white light: 4 high-power infrared LED Alarm lights: 8 red and blue lights, alarm mode, dual lamp street light mode, infrared + alarm light + alarm whistle white light + eviction light.
- 3 18650 Rechargeable batteries built-in, continuous cloudy low power standby time of up to 18 days.
- 3.6 mm lens angle up to 100 °, full HD 1080P resolution, frame rate: 1-30fps, WIFI antenna 5db. Mobile APP software control. Supports up to 128G memory cards.
- P66 weather resistance: all IP66 weatherproof rate, anti-jamming aluminum alloy shell, waterproof, lightning protection, moisture proof and mildew proof. Even in the face of storms and thunderstorms, the camera works stably and is suitable for a variety of harsh environments.

Specification

Image sensor	2 MP HD CMOS Sensor.
Resolution	1920 x 1080
Frame Rate	1 - 30fps
Min. Illumination	Color: 1.5Lut: B/W Lut with IR LED On
IR Distance	6pcs high-power IR LED, Night-vision at 25 meters
White Light	4 pcs high-power IR LEDs
Alarm Light	5 pcs red & Blue Lights
Lens / Visual Angel :	3,4 mm / 10p
Mobile Surveillance	Support millions of HD mobile surveillance.
	IOs & Android Available
Audion Compression	C. 711A.
Audio Input	Built-in 35dB Microphone
Audio Output	Built-in Speaker (8c) 1 w)
Recording Mode	Whole day recording, timing recording and alarm recording
Video Storeage	support max 128G TF Card
Protocols	TCP IP, HTTP, TCP, UDP, SMTP, DHCP, NTP, UP-p.P2P, etc
Wireless	WIFI 902 11 b/g/n wireless network
Alarm Input	learning wireless sensor alarm input
Motion Detection	support
System Configuration	IOs7.1.Android 4.0 and aboce
Material	Aluminum alloy
Battery	3 pcs 18650 recharge battery in camera
Power	5v1a usb charge
Working Temperature	-10~50°C